



### P.C.B Layout (copper-sided view)

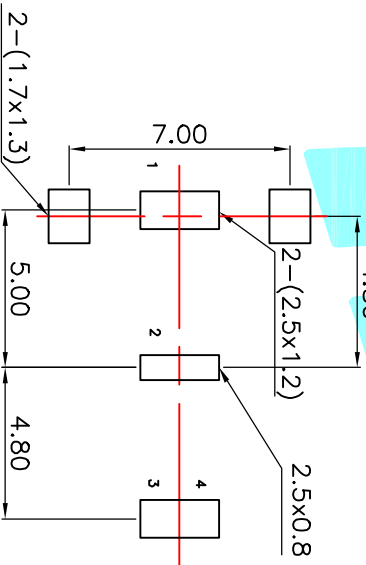

Rating: 0.5A 30V DC  
Contact Resistance: 100 mΩ Max.  
Operating temperature: -20°C~70°C  
Operating force: 3~20N  
Operating Life: 5,000 cycles

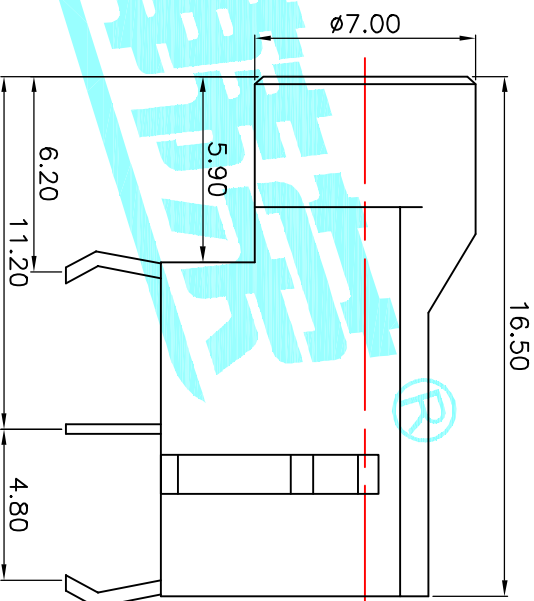

| Model NO  | PJ-3134A-A | PJ-3134A-B |
|-----------|------------|------------|
| Schematic |            |            |

|   |  |  |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|--|--|
| Operating temperature: -20℃~70℃   |  |  |  |  |  |  |  |  |  |
| Operating force: 3~20N  |  |  |  |  |  |  |  |  |  |
| Operating Life: 5,000cycles   |  |  |  |  |  |  |  |  |  |
| <div><div>② Terminal</div><div>① Housing</div><div>ITEM PART NAME</div></div> <div><div>5</div><div>1</div><div>TER'NO. QTY.</div></div> <div><div>Phosphor bronze</div><div>Nylon</div><div>MATERIAL</div></div> <div><div>Au Plating</div><div>Black</div><div>FINISHING</div></div> <div><div>REMARK</div></div> |  |  |  |  |  |  |  |  |  |
| APPROVALS   |  |  |  |  |  |  |  |  |  |
| DRAWN J.X.Zhang 2013/11/11  |  |  |  |  |  |  |  |  |  |
| CHECKED   |  |  |  |  |  |  |  |  |  |
| APPROVALS   |  |  |  |  |  |  |  |  |  |
| TITLE: PHONE JACKES   |  |  |  |  |  |  |  |  |  |
| PART NO. PU-3134A   |  |  |  |  |  |  |  |  |  |
| TOLERANCES ARE  |  |  |  |  |  |  |  |  |  |
| 30~100 ±0.30  |  |  |  |  |  |  |  |  |  |
| 10~30 ±0.20   |  |  |  |  |  |  |  |  |  |
| 5~10 ±0.15  |  |  |  |  |  |  |  |  |  |
| ~5 ±0.10  |  |  |  |  |  |  |  |  |  |
| ANGLE 4.2°  |  |  |  |  |  |  |  |  |  |
| UNIT: mm  |  |  |  |  |  |  |  |  |  |
| SCALE: 1:1  |  |  |  |  |  |  |  |  |  |
| PROJ. 1ST   |  |  |  |  |  |  |  |  |  |
| DRAWING NO. SHEET 1 of 1  |  |  |  |  |  |  |  |  |  |