





P.C.B LAYOUT(copper-sided view)

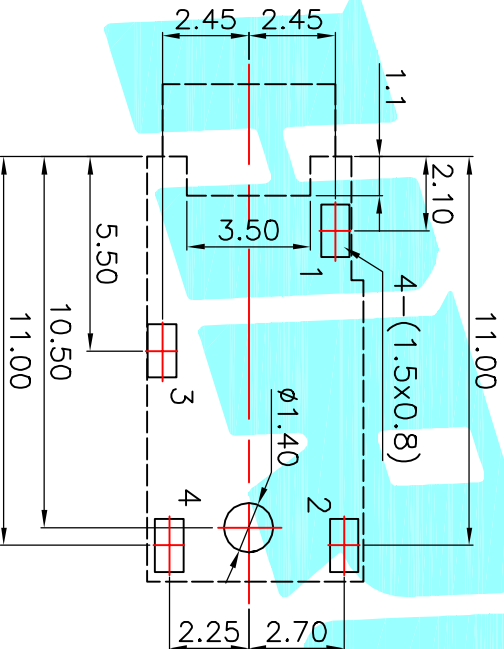

Model No.	PJ-3810-A	PJ-3810-B
Schematic		

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:−20℃~70℃
Operating force:3~20N
Operating Life:5,000cycles

Rating:0.5A 30V DC									
Contact Resistance:100 mΩ Max.									
Operating temperature:-20℃~70℃									
Operating force:3-20N									
Operating Life:5,000cycles									
ECN NO.		REV.		DATE.		DESCRIPTION.			
A						NEW			
						CHANGE.			
						CHECK.			
						APPRO.			
TOLERANCES ARE									
30~0.1		±0.30		ANGLE					
10~30		±0.20							
5~10		±0.15							
~5		±0.10		±2°					
				UNIT: mm		SCALE: 1:1		PROJ. 	
				DRAWING NO.				SHEET 1 of 1	
DRAWN J.X.Zhang 2013/11/11									
ELECTRONICS CO.,LTD									
CHECKED									
APPROVALS									
TITLE: PHONE JACKS									
PART NO. PJ-3810									