




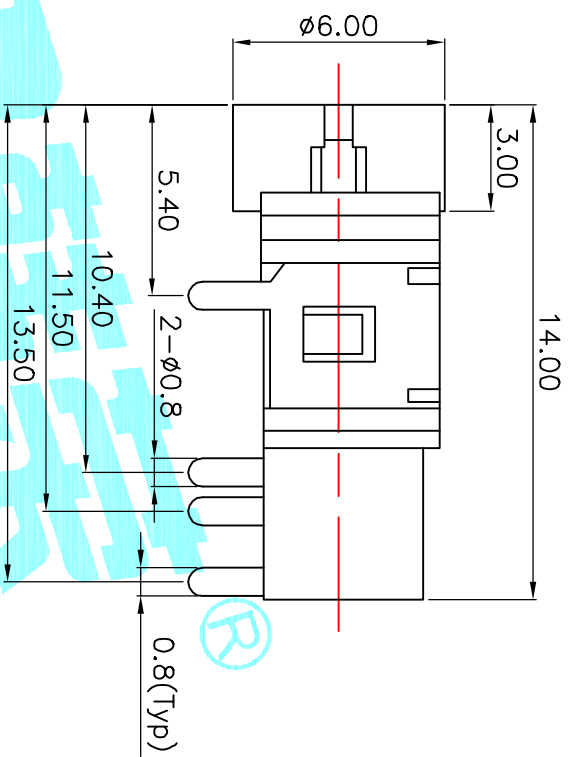

ROHS

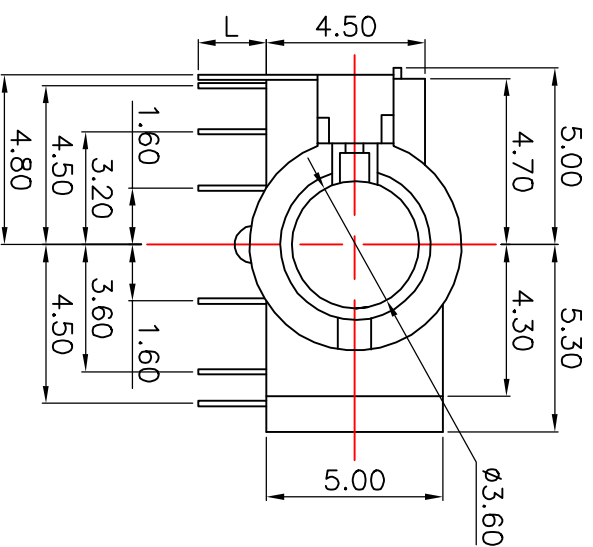

P.C.B LAYOUT(copper-sided view)

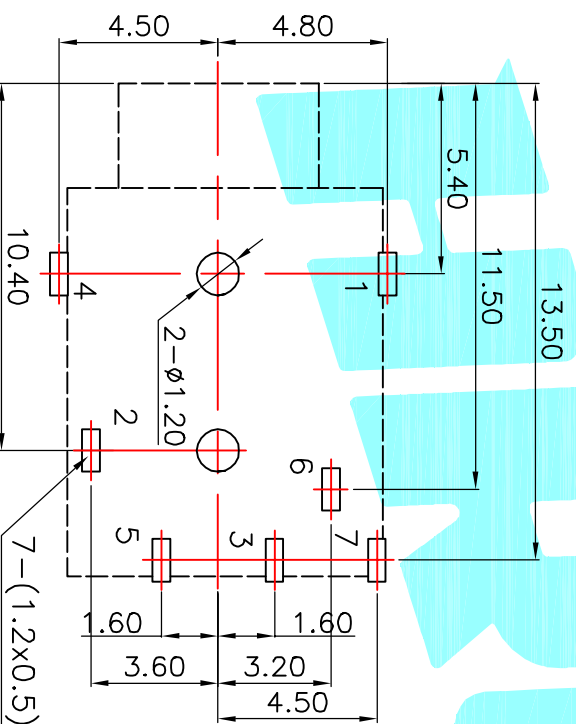

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:−20℃~70℃
Operating force:3~20N
Operating Life:5,000cycles

②	Terminal	—	7	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TERNO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11		ELECTRONICS CO.,LTD		
CHECKED		TITLE:		PHONE JACKS		
APPROVALS		PART NO.		PJ-3620		
TOLERANCES ARE		30~0.1	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			PROJ. 
		5~10	±0.15	±2°	DRAWING NO.	SHEET 1 OF 1
		~ 5	±0.10			