
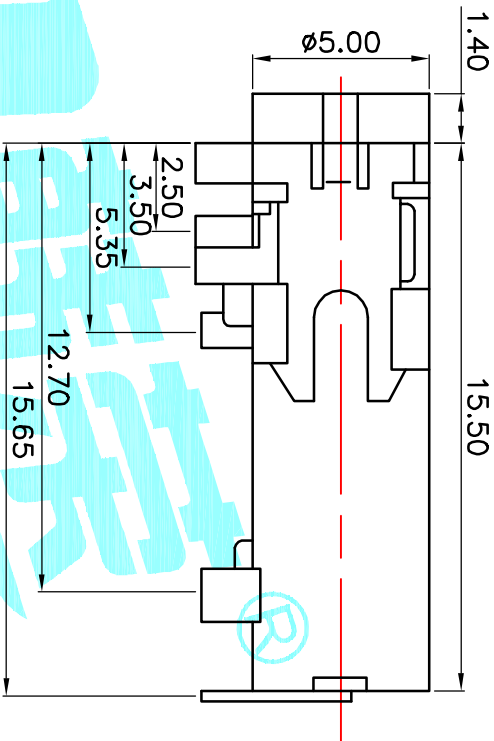


P.C.B LAYOUT(copper-sided view)

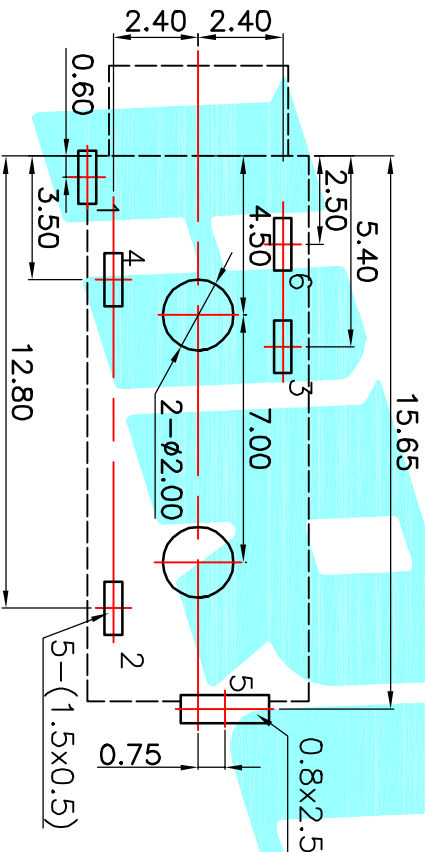

Model No.	PJ-3280C-A	PJ-3280C-B	PJ-3280C-C
Schematic			
Model No.	PJ-3280C-D	PJ-3280C-E	PJ-3280C-F
Schematic			

Rating:0.5A 30V DC  
Contact Resistance:100 mΩ Max.  
Operating temperature:-20℃~70℃  
Operating force:3-20N  
Operating Life:5,000cycles

②	Terminal	—	6	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TERNO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS				DATE	ELECTRONICS CO.,LTD	
DRAWN		J.X.Zhang		2013/11/11	PHONE JACKES	
CHECKED					TITLE:	
APPROVALS					PART NO.	
					PJ-3280C	
TOLERANCES ARE		30 <sup>±0.1</sup>	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15	±2°	DRAWING NO.	PROJ.
		~ 5	±0.10			SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			