



P.C.B LAYOUT(copper-sided view)



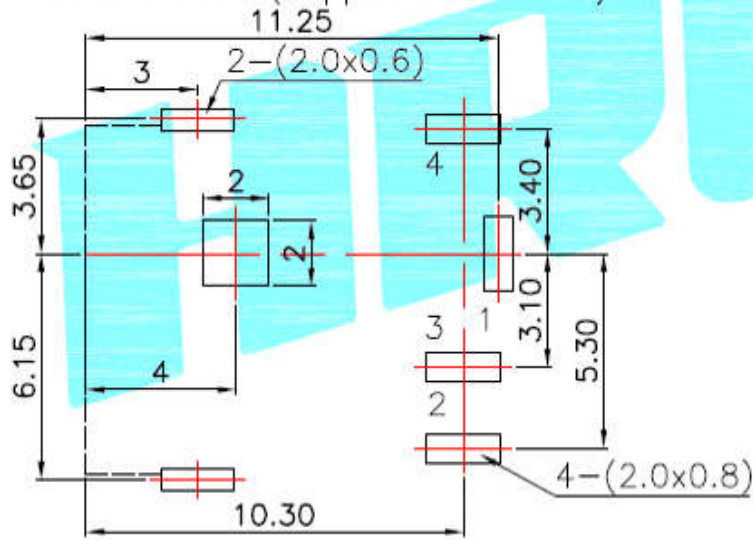

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

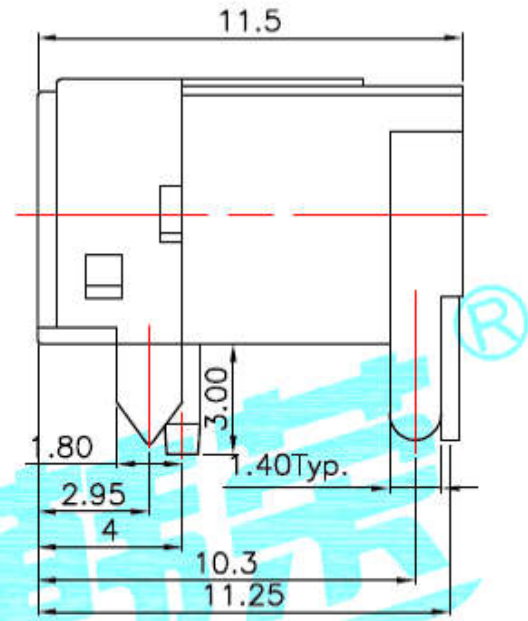

Model No.	DC-044C-A	DC-044C-B
Schematic		
Model No.	DC-044C-C	DC-044C-D
Schematic		

Model No.	1	2	3
PIN	ø1.65	ø2.0	ø2.5

②	Terminal	——	4	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11		ELECTRONICS CO.,LTD		
CHECKED				TITLE:	PHONE JACKS	
APPROVALS				PART NO.	DC-044C	
TOLERANCES ARE			30~100 ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1
			±2'	DRAWING NO.	——	PROJ. 
						SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			