


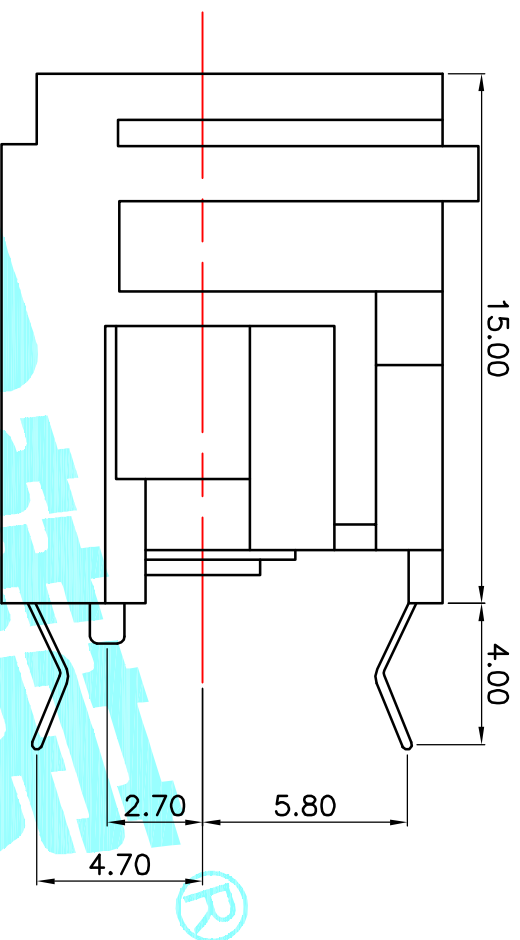
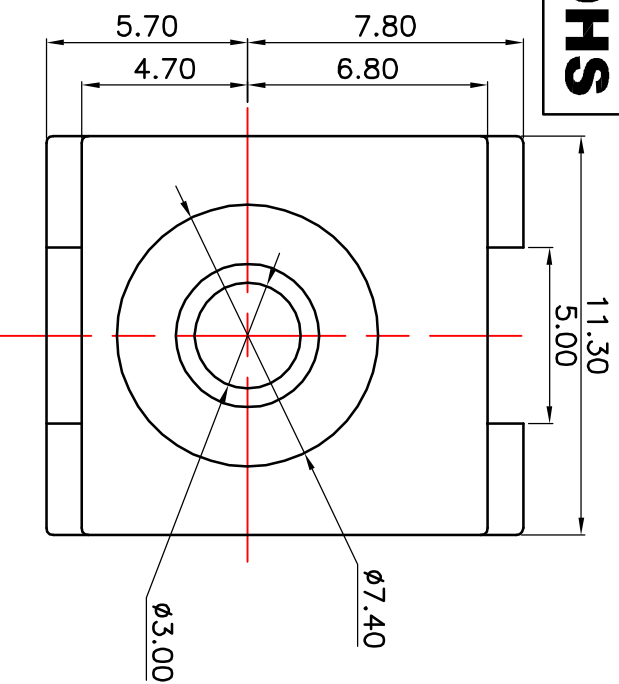


ROHS

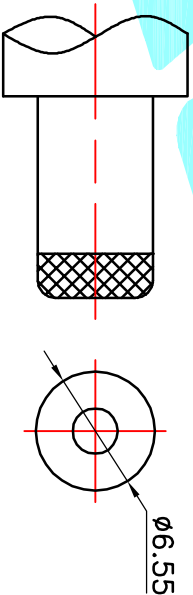

P.C.B LAYOUT(copper-sided view)

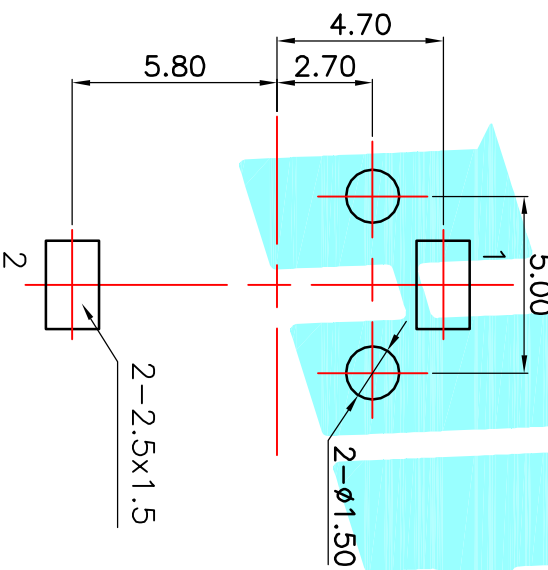

DC MATE PLUG


Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:−20℃~70℃
Operating force:3–20N
Operating Life:5,000cycles

②	Terminal	—	2	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE
DRAWN	J.X.Zhang	2013/11/11

HRD 慧研
ELECTRONICS CO.,LTD

CHECKED		TITLE:	PHONE JACKES
APPROVALS		PART NO.	DC-024

	30-47.1	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ. 
	10-30	±0.20				
TOLERANCES ARE	5-10	±0.15				
	~ 5	±0.10	±2°	DRAWING NO. _____		SHEET 1 OF _____