


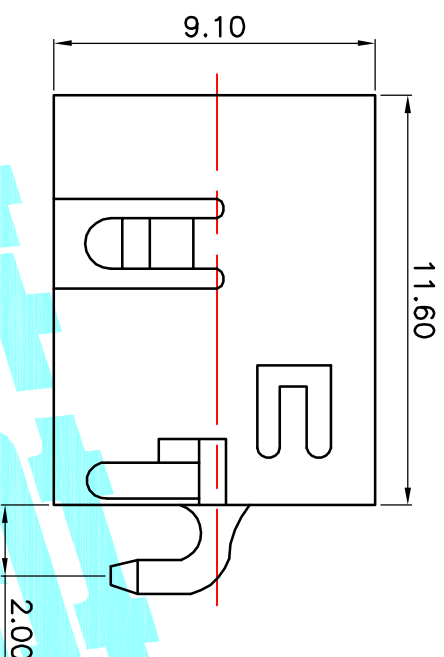


# ROHS

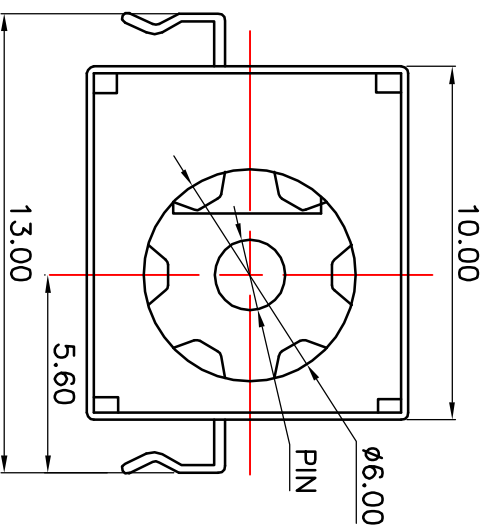

P.C.B LAYOUT TOP VIEW

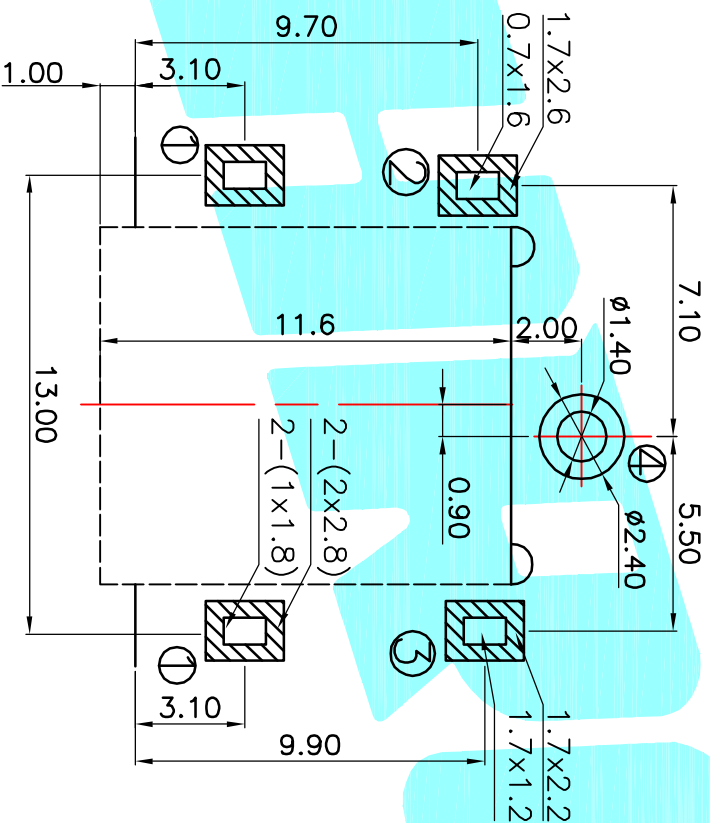

PIN	ø1.65	ø2.0	ø2.5
APPD			

Rating:0.5A 30V DC  
Contact Resistance:100 mΩ Max.  
Operating temperature:−20℃~70℃  
Operating force:3–20N  
Operating Life:5,000cycles

②	Terminal	—	3	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE
DRAWN	J.X.Zhang	2013/11/11

**HPD 華平達**  
ELECTRONICS CO.,LTD

CHECKED		TITLE: PHONE JACKES
APPROVALS		PART NO. DC-028S

	30-40 ft.	\$0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ. 
	10-30	\$0.20				
	5-10	\$0.10				
TOLERANCES ARE	~ 5	\$0.10	±2°	DRAWING NO. _____		SHEET 1 OF _____