


P.C.B LAYOUT(copper-sided view)

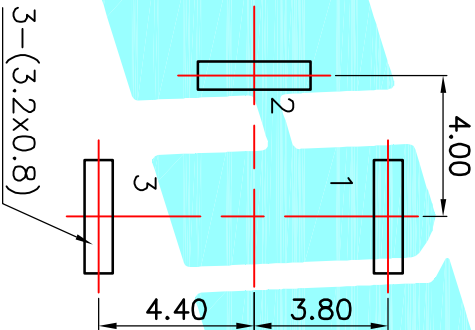

Rating:0.5A 30V DC  
Contact Resistance:100 mΩ Max.  
Operating temperature:-20℃~70℃  
Operating force:3-20N  
Operating Life:5,000cycles

Model No.	1	2	3
PIN	φ2.0	φ2.35	φ2.5

Model No.	DC-025M-A	DC-025M-B
	DC-025-A	DC-025-B
Schematic		

Model No.	DC-025	DC-025M
A	φ8.0	M8xP0.75

DRAWN		J.X.Zhang	2013/11/11		ELECTRONICS CO.,LTD	
CHECKED					TITLE: PHONE JACKES	
APPROVALS					PART NO. DC-025	
TOLERANCES ARE		30~0.15 10~0.30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10		ANGLE	
					UNIT: mm	
					SCALE: 1:1	
					DRAWING NO.	
					SHEET 1 OF 1	
ECN NO.		REV.	DATE.		DESCRIPTION.	
		A			NEW	
					CHANGE.	
					CHECK.	
					APPRO.	