



ROHS

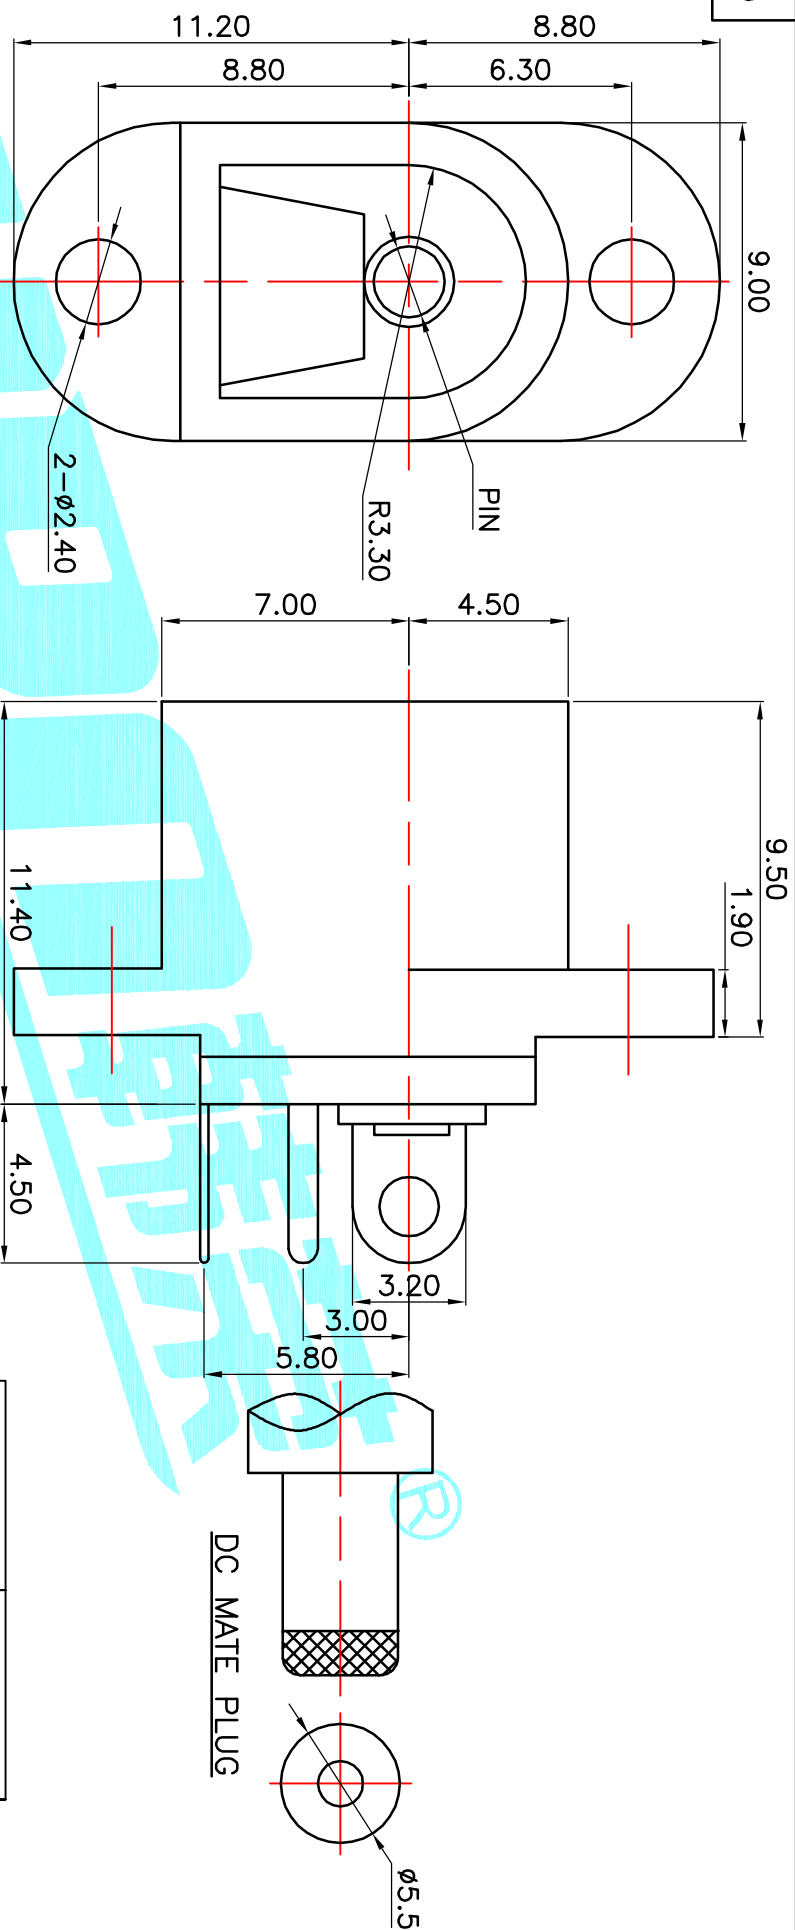

P.C.B LAYOUT(top view)

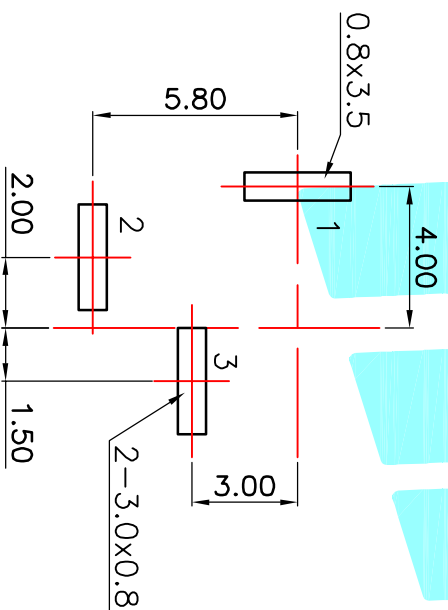


Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:−20℃~70℃
Operating force:3–20N
Operating Life:5,000cycles

Model No.	1	2	3
PIN	ø2.0	ø2.35	ø2.5

DC-016-A	DC-016-B
CIRCUIT DIAGRAM	

②	Terminal	—	3	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		 ELECTRONICS CO.,LTD
DATE		
DRAWN	J.X.Zhang	2013/11/11

CHECKED		TITLE:	PHONE JACKES
APPROVALS		PART NO.	DC-016

					TOLERANCES ARE	UNIT:	SCALE:	PROJ.
					30° ± 0.1 10~30 ± 0.20 5~10 ± 0.15 ~ 5 ± 0.10	ANGLE	mm	1:1
ECON NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	DRAWING NO.	SHEET	1 OF 1
	A		NEW					