

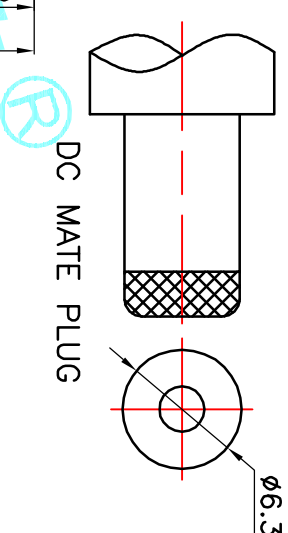
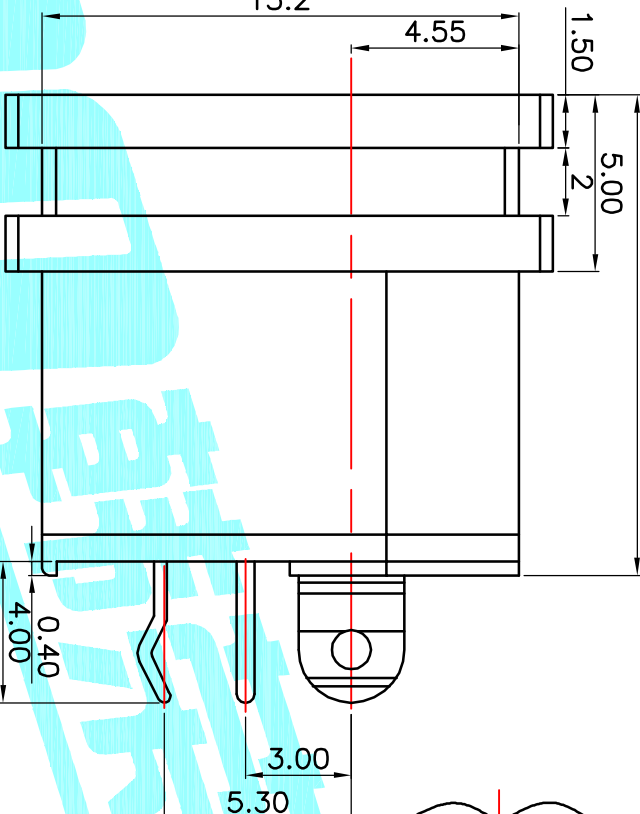


ROHS

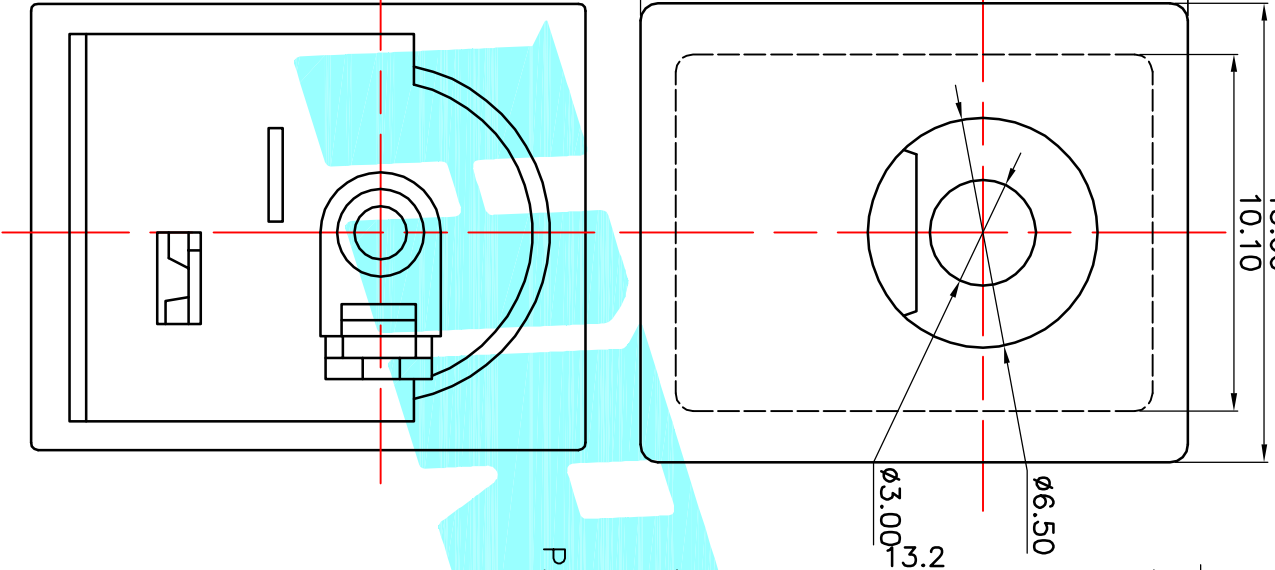

P.C.B LAYOUT (Copper—side view)

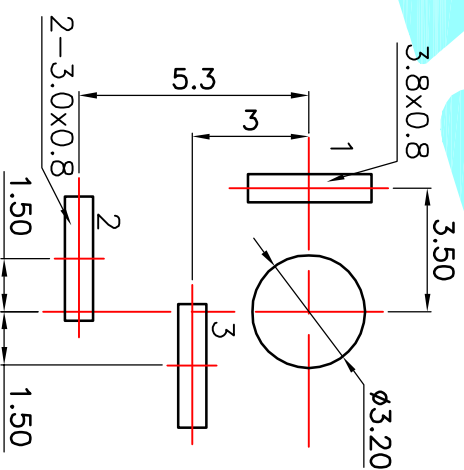

DC-015B-A	DC-015B-B
CIRCUIT DIAGRAM	


Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:−20℃~70℃
Operating force:3~20N
Operating Life:5,000cycles

②	Terminal	—	3	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE
J.X.Zhang		2013/11/11

HPD 海普达
ELECTRONICS CO.,LTD

CHECKED		TITLE:	PHONE JACKES
APPROVALS		PART NO.	DC-015B

	30±0.17	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ. 
TOLERANCES ARE	10-30	±0.20				
	5-10	±0.15				
	~ 5	±0.10	±2°	DRAWING NO. _____		SHEET 1 OF _____