



1. MATERIAL:
- 1.1 HOUSING: LCP, UL94V-0; COLOR: BLACK
  - 1.2 MOLDING: LCP, UL94V-0; COLOR: BLACK.
  - 1.3 CONTACT: C7025, T=0, 20mm
  - 1.4 SHELL: SUS, T=0, 15mm
  - 1.5 LATCH: SUS, T=0, 40mm
  - 1.6 EMI SPRING: SUS, T=0, 08mm
2. FINISH:
- 2.1 CONTACT: GOLD FLASH PLATED IN CONTACT AREA ;  
TIN PLATED IN SOLDER AREA AND NICKEL UNDERPLATED OVERALL.
  - 2.2 SHELL: NICKEL PLATED OVERALL.
  - 2.3 LATCH: NICKEL PLATED OVERALL.
3. NOTES:
- 3.1 THIS COMPONENT AND ITS HOMOGENEOUS SUBCOMPONENTS ARE RoHS2.0 COMPLIANT.

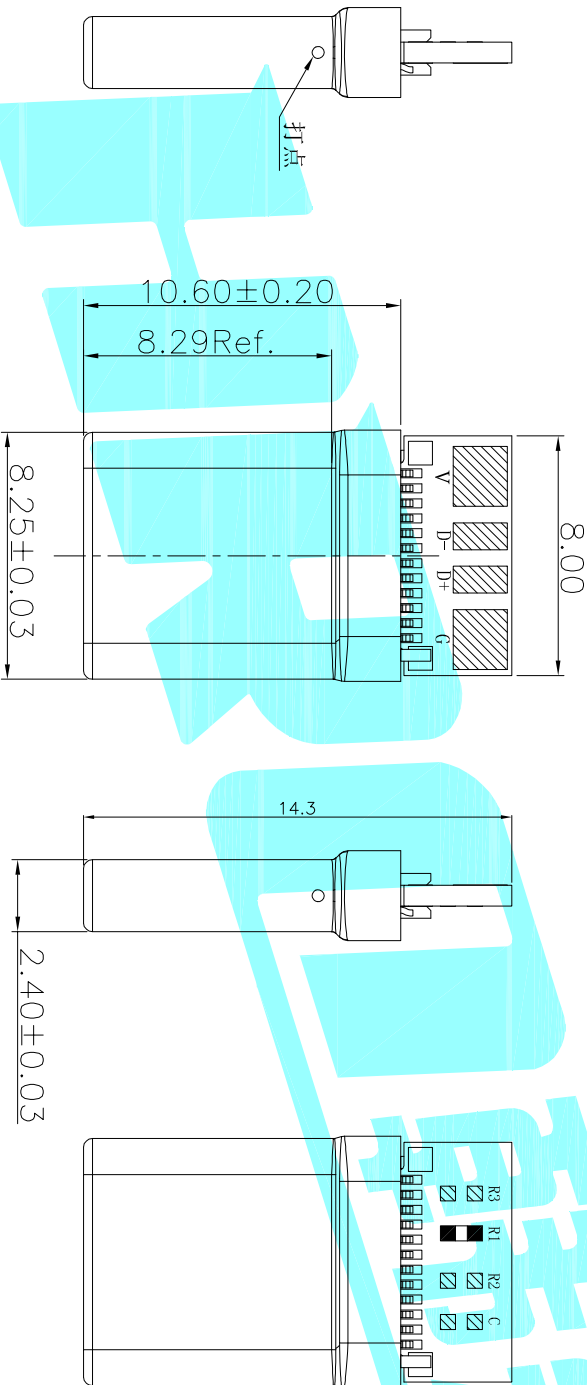

APPROVALS		DATE		<div>HIROSE<sup>®</sup></div> <div>ELECTRONICS CO.,LTD</div>			
DRAWN		D.J.LV					
CHECKED				TITLE:		USB CONNECTOR	
APPROVALS				PART NO.		TYPE-C-31-G-02	
A		NEW					
ECN NO.		REV.		DATE.		DESCRIPTION.	
						CHANGE.	
						CHECK.	
						APPRO.	
						TOLERANCES ARE	
						30~11.5 ±0.30 ANGLE UNIT: mm SCALE: 1:1 PROD.  SHEET 1 of 1	
						10~30 ±0.20	
						5~10 ±0.15	
						~ 5 ±0.10	