


特性: Specifications;
电器: Electrical:
接触阻抗: Contact Resistance
30 millionms MAX


耐电压: Dielectric Withstanding Voltage:
500v AC AT Sea Level
绝缘阻抗: Insulation Resistance:
1000 MEGA ohms MLN

机构: Mechanical:
接合为: Mating Force;
4.0 KG MAX 最大4Kg
拔出力: Unmating Force;
0.7KG MIN.最少0.7KG




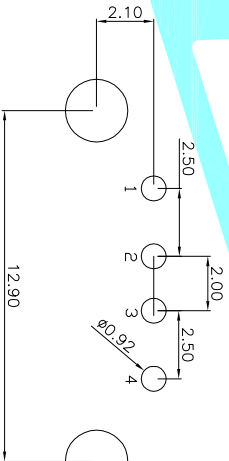


PART NO	H
U-A-24DD-Y-7	13.00
U-A-24DD-Y-8	13.70
U-A-24DD-Y-9	15.00

Recommended PCB Layout

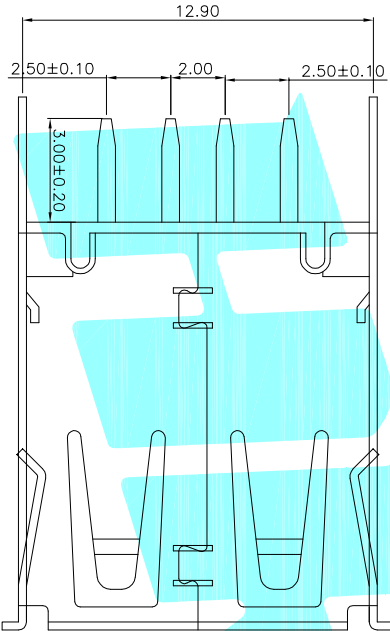

③	Base	—	1	NYLON	White
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	SPCC/Phosphor Bronze	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE		H300ELECTRONICS CO.,LTD	
DRAWN		JIANKUN.LU		2015.03.18	
CHECKED		TITLE:		USB CONNECTOR	
APPROVALS		PART NO.			
TOLERANCES ARE		30~以上 10~30 5~10 ~ 5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE ±2°	UNIT: mm SCALE: 1:1 PROJ: SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.		
	A		NEW		
			CHANGE.		
			CHECK.		
			APPRO.		

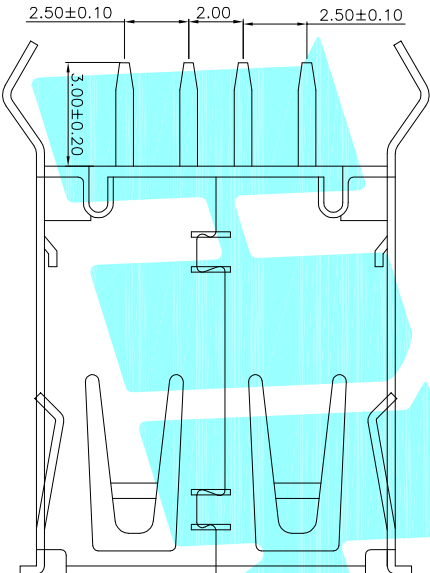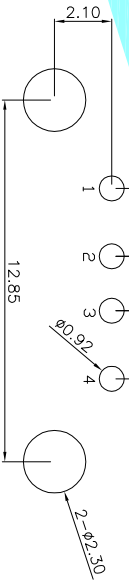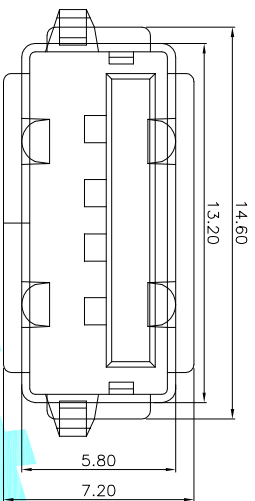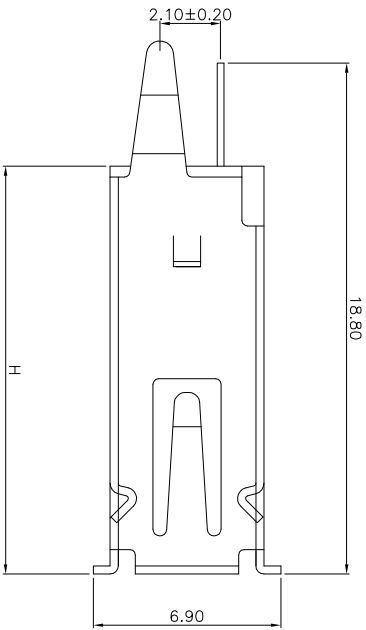

Recommended PCB Layout


特性: Specifications;
电器: Electrical;
接触阻抗: Contact Resistance



30 millionms MAX
耐电压: Dielectric Withstanding Voltage:
500v AC AT Sea Level
绝缘阻抗: Insulation Resistance:
1000 MEGA ohms MLN

机构: Mechanical;
接合为: Mating Force;
4.0 KG MAX 最大4Kg
拔出力: Unmating Force;
0.7KG MIN.最少0.7KG

PART NO	H
U-A-24DD-Y-2	13.00
U-A-24DD-Y-3	13.70
U-A-24DD-Y-4	15.00

③	Base	—	1	NYLON	White
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	SPCC/Phosphor Bronze	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING

APPROVALS		DATE	 ELECTRONICS CO.,LTD
DRAWN		JIANKUN.LU 2015.03.18	

						CHECKED		TITLE:		USB CONNECTOR	
						APPROVALS		PART NO.			
						30~以上 10~30 5~10 ~ 5		±0.30 ±0.25 ±0.20 ±0.15		ANGLE ±2°	
								UNIT: mm		SCALE: 1:1	
								DRAWING NO.		SHEET 1 OF 1	
										PROJ- 	
											
A		NEW									
ECN NO.		REV.		DATE.		DESCRIPTION.		CHANGE.		CHECK.	
								APPRO.			