

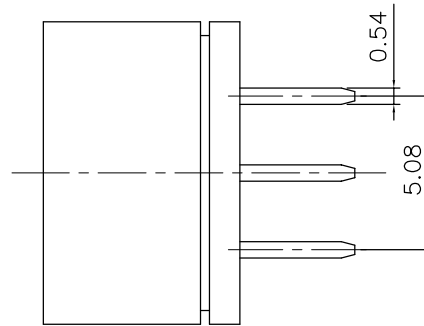
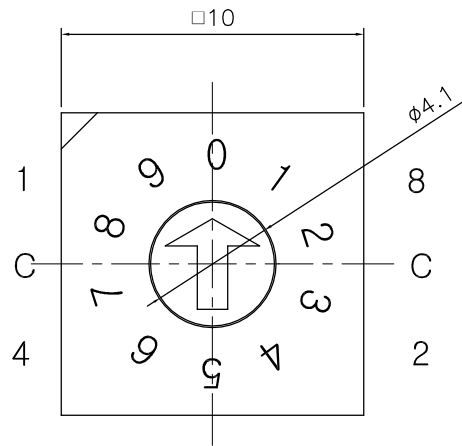


MRK.	DATE	REVISION	SIGN
△			

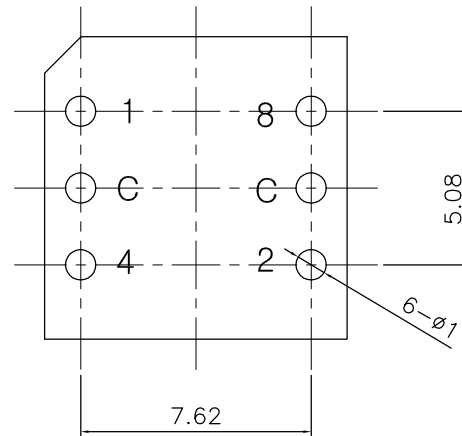


## SPECIFICATION

1. RATING : 150mA 42V DC (SWITCHING)  
200mA, 42V DC (NONE-SWITCHING)
2. CONTACT RESISTANCE : 80mΩ MAX.
3. INSULATION RESISTANCE : 100MΩ MIN.
4. OPERATING FORCE : 700gf MAX.
5. LIFE CYCLE : 10,000 STEPS
6. SEALING : COMPARABLE WITH IP67

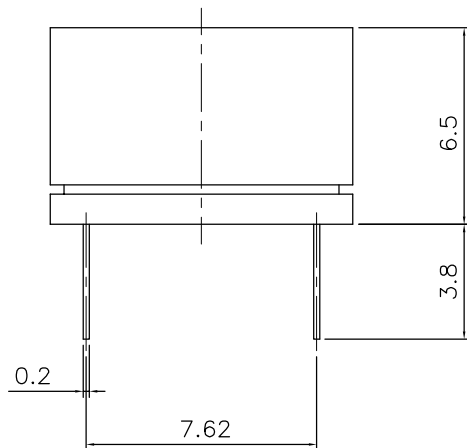

P.C.B DIMENSION

		Real Code				
10 P o s i t i o n		C	1	2	4	8
	0	●				
	1	●	●			
	2	●		●		
	3	●	●	●		
	4	●			●	
	5	●	●		●	
	6	●		●	●	
	7	●	●	●	●	
	8	●				●
16 P o s i t i o n	9	●	●			●
	A	●		●		●
	B	●	●	●		●
	C	●			●	●
	D	●	●		●	●
	E	●		●	●	●
	F	●	●	●	●	●

Q1	-	-	-	1	-
NO.	DESCRIPTION	MATERIAL	COLOR/FINISH	Q.TY	VENDOR
DRAW/DESIGNED	CHECKED	APPROVED	 G.TOL ±0.1	TITLE	ROTARY SWITCH
W.J.LEE	J.P.ROH	K.I.LEE		MODEL	
			UNIT mm	SCALE 4:1	QDR-10
SUNGUN ELECTRONICS CO.,LTD			SIZE A4	DRAW NO.	
				QQDR-1000-01	1/1