



SPECIFICATIONS

CIRCUIT: SPST

FUNCTION: Momentary

CONATE RATING: 50 mA @ 12V DC.

OPERATING FORCE: 350 gf ±100gf.

TOTAL TRAVEL: 0.25mm ± 0.10mm

MECHANICAL LIFE: 100,000 make-and-break cycles.

CONTACT RESISTANCE: 100mΩ max. initial

INSULATION RESISTANCE: 100MΩ min.

DIELECTRIC STRENGTH: 250 V RMS @ sea level.

OPERATING TEMPERATURE: -25C to 70C.

MATERIALS

CASE: Glass filled Nylon 6/6(UL 94-V0).

HOUSING: Glass filled Nylon 6/6(UL 94-V0).


ACTUATOR: PC.

TERMINAL/CONTACT: Brass,Silver plated.

IP 67
ACCORDING TO
EN 60529:1991+A1:2001
IEC 60529:2001



HOW TO ORDER

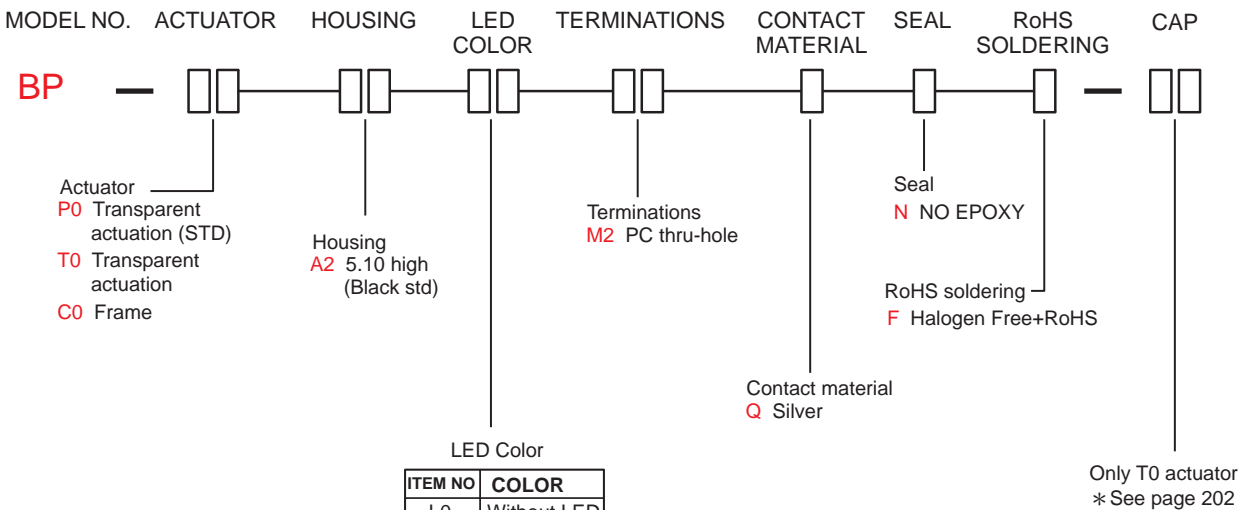


ITEM NO	COLOR
L0	Without LED
L1	White
L3	Red
L5	Yellow
L6	Green
L7	Blue

BP Series


Short-Stroke Touch Switches(Washable)

ACTUATOR TYPE


P0

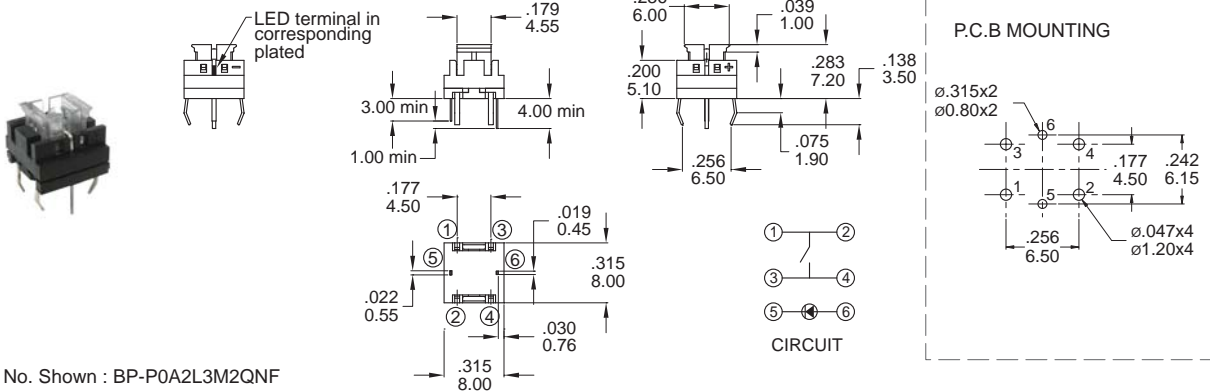

T0

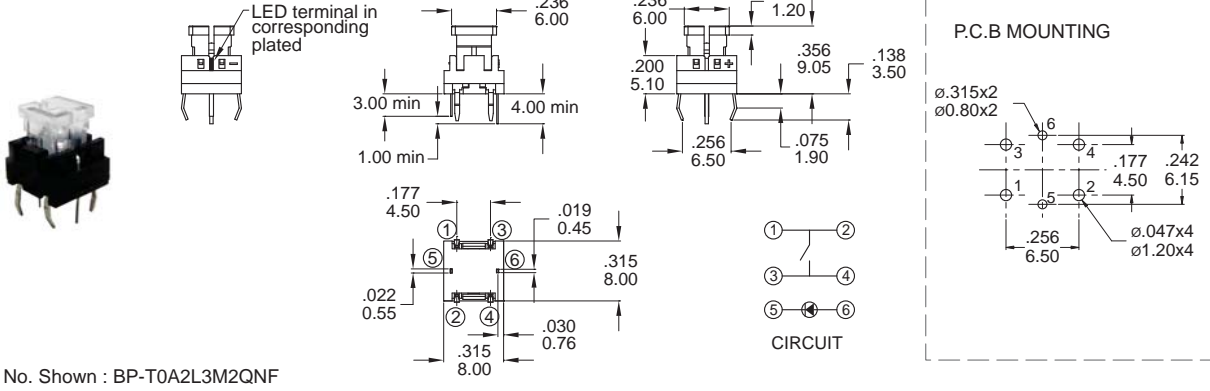

* Cap can only be used with T0 actuator



CAP OPTION				
DIMENSION	 □7.4 1.5	 □7.4 1.5	 □7.4 7.1	 □7.4 7.1 ø6.0
COLOR	CAP CODE			
TRANSPARENT	—	BA	—	—
ICE	—	—	CB	DB
SNOW	—	—	—	CC
WHITE	AD	BD	—	—

C0

