

# MHR-08S




MHR-08S

## M Series

### 1 Type

Round  
SMD Type

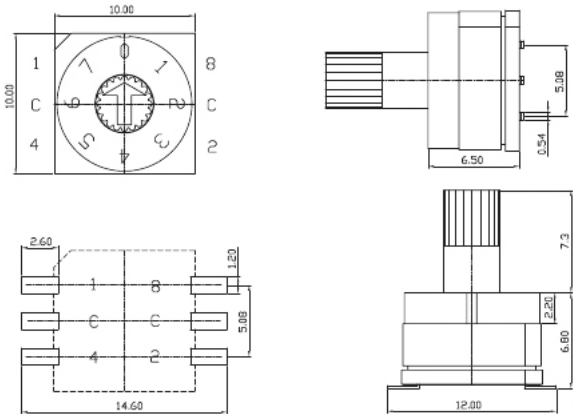

### How to Order 选型表

Type	Actuators	Code	Position	Terminals	Packing
1	2	3	4	5	6
ex) P	E	R	10	S	TR



Type	Actuators	Code	Position	Terminals	Packing
1	2	3	4	5	6
ex) M	E	R	10	S	TR

### General Specification 产品性能



1. Rating 工作电流, 电压	Voltage 42V 150mA (Switching) 200mA (None-Switching)
2. Contact Resistance 接触电阻	80mΩ Max
3. Insulation Resistance 绝缘电阻	100MΩ Min
4. Operating Force 操作力	700gf Max
5. Life Cycle 使用寿命	10,000 steps
6. Solder Condition 焊接方式	Reflow Soldering : 10s/260°C Iron Soldering : 4s/350°C Wave Soldering : 5s/280°C
7. Sealing 防水系数	IP67 (Dust & Water Proof) * Except Cross Type of Actuator ("D" Type)

## 2 Actuators 外观形式



D





E





F



G



H



## 3 Code 编码表

See Page 37

## 4 Position 位数形式

4 Position

6 Position


8 Position

10 Position


16 Position

## 5 Terminals PIN角形式

- Standard Type

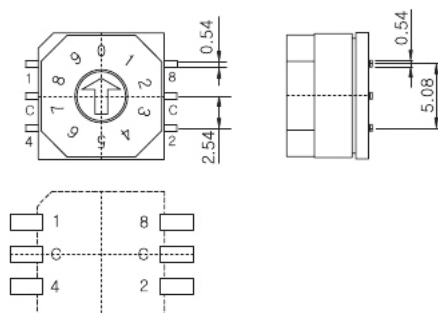


C (3×2 Ter')

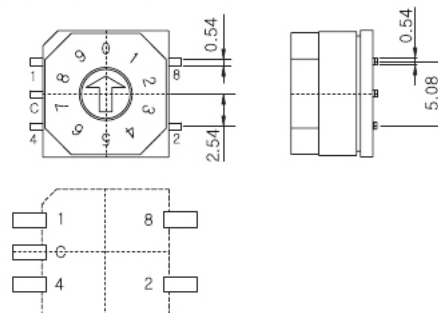

## 6 Packing 包装形式


- Tube Packing  
Q'ty : 50pcs / Tube



TR Reel Packing  
(See Page 49)


## Accessories 配件

AC-100 G



\* Applicable to only 'D' Actuators  
\* Should be mounted after soldering

BC-200 G



BC-200 G  
L : 7.3mm

BC-201 G  
L : 11.6mm

BC-202 G  
L : 13.3mm

G : Gray R : Red K : Black  
Y : Yellow B : Blue C : Clear