


MER-06





MER-06

M Series

1 Type

Round
Type

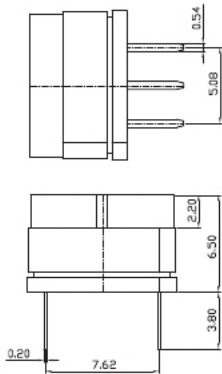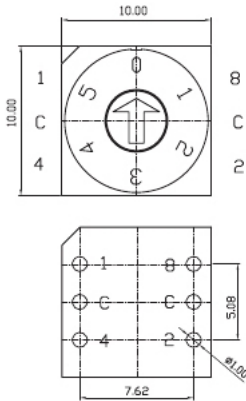

How to Order 选型表


Type	Actuators	Code	Position	Terminals	Solder Condition
1	2	3	4	5	6
ex) P	E	R	10	C	-

Type	Actuators	Code	Position	Terminals	Solder Condition
1	2	3	4	5	6
ex) M	E	R	10	C	-

General Specification 产品性能

1. Rating 工作电流, 电压	Voltage 42V 150mA (Switching) 200mA (None-Switching)
2. Contact Resistance 接触电阻	80mΩ Max
3. Insulation Resistance 绝缘电阻	100MΩ Min
4. Operating Force 操作力	700gf Max
5. Life Cycle 使用寿命	10,000 steps
6. Solder Condition 焊接方式	Iron Soldering : 2s/340°C Wave Soldering : 5s/280°C
7. Sealing 防水系数	IP67 (Dust & Water Proof) * Except Cross Type of Actuator ("D" Type)

2 Actuators 外观形式

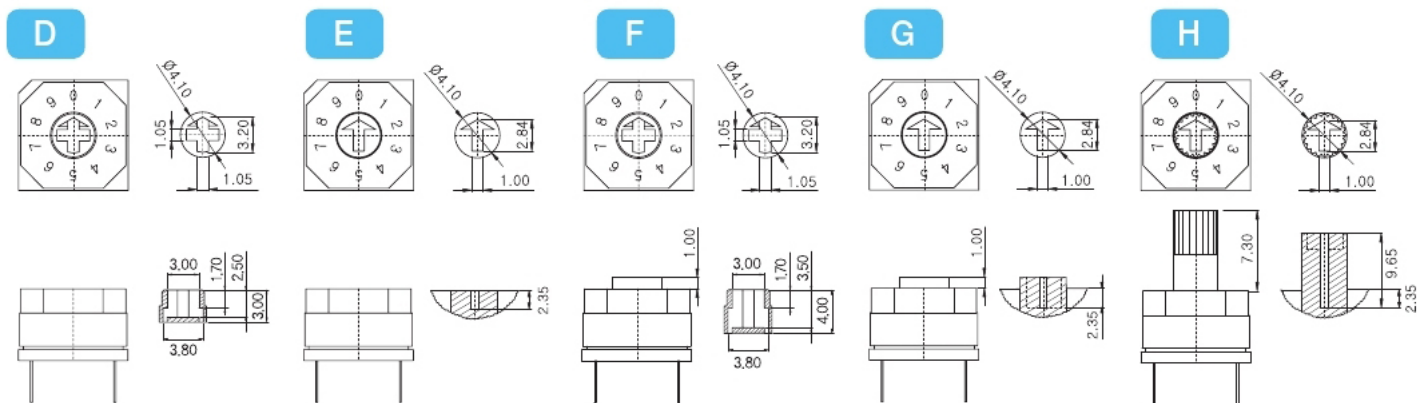

3 Code 编码表

See Page 37

4 Position 位数形式

4 Position

6 Position


8 Position

10 Position


16 Position

5 Terminals PIN角形式

- Standard Type



C (3 × 2 Ter')



6 Solder Condition 焊接方式

-


PCB Hole Type : Iron Soldering : 2s/340°C
Wave Soldering : 5s/280°C

T

Through Hole Reflow : Reflow Soldering : 10s/260°C
Iron Soldering : 2s/340°C
Wave Soldering : 5s/280°C


7 Packing 包装形式

- Tube Packing Q'ty : 50pcs / Tube

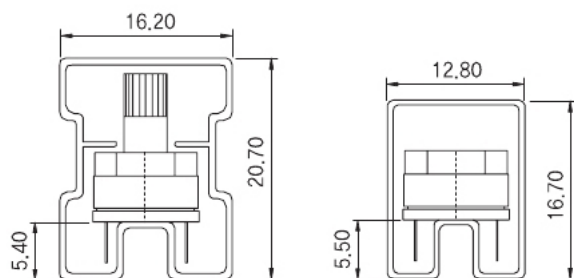


Accessories 配件

AC-100



* Applicable to only 'D' Actuators
* Should be mounted after soldering

BC-200



BC-200
L : 7.3mm

BC-201
L : 11.6mm

BC-202
L : 13.3mm

G : Gray R : Red K : Black
Y : Yellow B : Blue C : Clear