


BHR-16S



1 Type

Octagon
Type

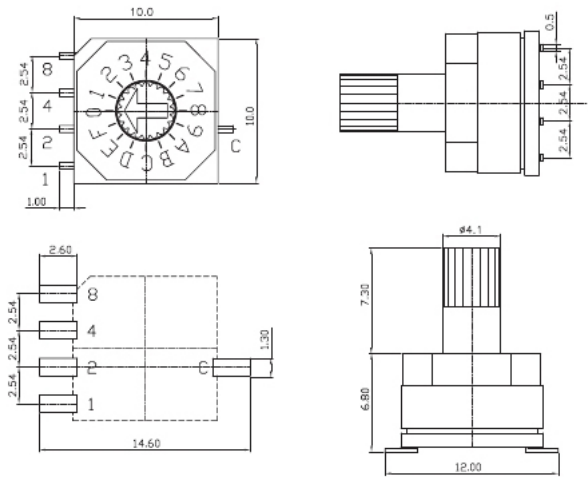


How to Order 选型表

Type	Actuators	Code	Position	Terminals	Packing	
1	2	3	—	4	5	6
ex) B	E	R	10	S	TR	

General Specification 产品性能

1. Rating 工作电流, 电压	Voltage 42V 150mA (Switching) 200mA (None-Switching)
2. Contact Resistance 接触电阻	80mΩ Max
3. Insulation Resistance 绝缘电阻	100MΩ Min
4. Operating Force 操作力	700gf Max
5. Life Cycle 使用寿命	10,000 steps
6. Solder Condition 焊接方式	Reflow Soldering : 10s/260°C Iron Soldering : 4s/350°C Wave Soldering : 5s/280°C
7. Sealing 防水系数	IP67 (Dust & Water Proof) * Except Cross Type of Actuator ("D" Type)

2 Actuators 外观形式

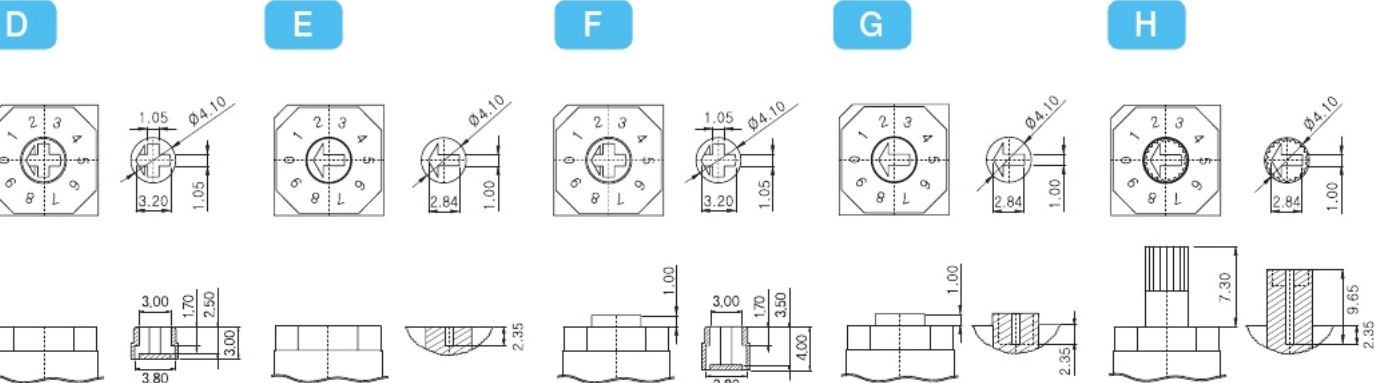

3 General Code 通用编码表

R Real Code

04 Position	Real Code		
	C	1	2
0	*		
1	*	*	
2	*		*
3	*	*	*

06 Position	Real Code			
	C	1	2	4
0	*			
1	*	*		
2	*		*	
3	*	*	*	
4	*		*	*
5	*	*	*	*

08 Position	Real Code			
	C	1	2	4
0	*			
1	*	*		
2	*		*	
3	*	*	*	
4	*		*	*
5	*	*	*	*
6	*	*	*	*
7	*	*	*	*

10 Position	Real Code			
	C	1	2	4
0	*			
1	*	*		
2	*		*	
3	*	*	*	
4	*		*	*
5	*	*	*	*
6	*	*	*	*
7	*	*	*	*
8	*	*	*	*
9	*	*	*	*

16 Position	Real Code			
	C	1	2	4
0	*			
1	*	*		
2	*		*	
3	*	*	*	
4	*		*	*
5	*	*	*	*
6	*	*	*	*
7	*	*	*	*
8	*	*	*	*
9	*	*	*	*
10	*	*	*	*
11	*	*	*	*
12	*	*	*	*
13	*	*	*	*
14	*	*	*	*
15	*	*	*	*

C Complement Code

04 Position	Complement Code		
	C	1	2
0	*	*	*
1	*	*	*
2	*	*	*
3	*	*	*

06 Position	Complement Code			
	C	1	2	4
0	*	*	*	*
1	*	*	*	*
2	*	*	*	*
3	*	*	*	*
4	*	*	*	*
5	*	*	*	*

08 Position	Complement Code			
	C	1	2	4
0	*	*	*	*
1	*	*	*	*
2	*	*	*	*
3	*	*	*	*
4	*	*	*	*
5	*	*	*	*
6	*	*	*	*
7	*	*	*	*

10 Position	Complement Code			
	C	1	2	4
0	*	*	*	*
1	*	*	*	*
2	*	*	*	*
3	*	*	*	*
4	*	*	*	*
5	*	*	*	*
6	*	*	*	*
7	*	*	*	*
8	*	*	*	*
9	*	*	*	*

16 Position	Complement Code			
	C	1	2	4
0	*	*	*	*
1	*	*	*	*
2	*	*	*	*
3	*	*	*	*
4	*	*	*	*
5	*	*	*	*
6	*	*	*	*
7	*	*	*	*
8	*	*	*	*
9	*	*	*	*
10	*	*	*	*
11	*	*	*	*
12	*	*	*	*
13	*	*	*	*
14	*	*	*	*
15	*	*	*	*

Decimal (04 Position) (Terminal)	Complement Code			
	C	1	2	3
0	*	*	*	*
1	*	*	*	*
2	*	*	*	*
3	*	*	*	*
4	*	*	*	*

4 Position 位数形式

4 Position


6 Position

8 Position

10 Position


16 Position

5 Terminals PIN角形式

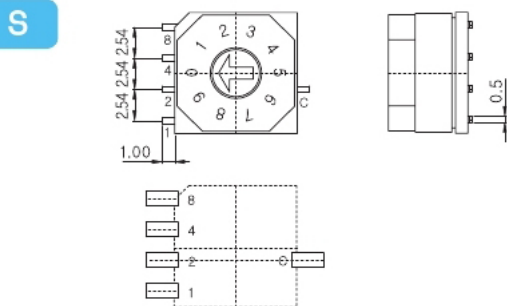

6 Packing 包装形式


- Tube Packing
Q'ty : 50pcs / Tube



TR Reel Packing
(See Page 49)


Accessories 配件

AC-100 [G]



* Applicable to only 'D' Actuators
* Should be mounted after soldering

BC-200 [G]



G : Gray R : Red K : Black
Y : Yellow B : Blue C : Clear