

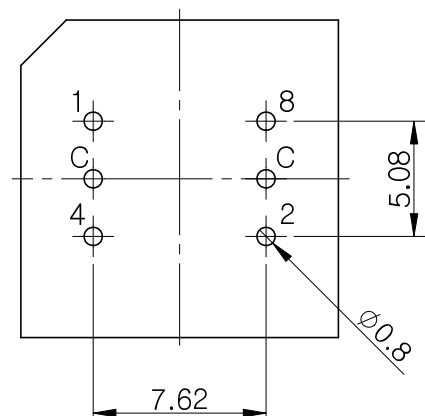
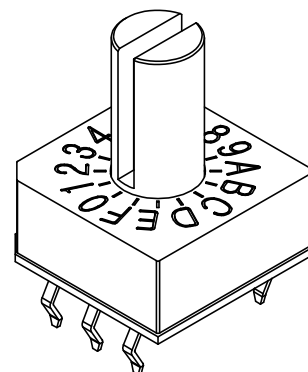
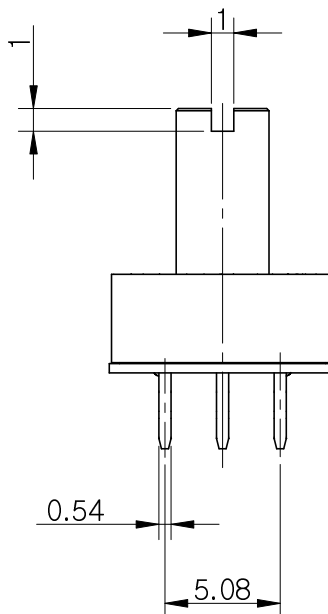


| MRK. | DATE | REVISION | SIGN |
|------|------|----------|------|
| △ | | | |

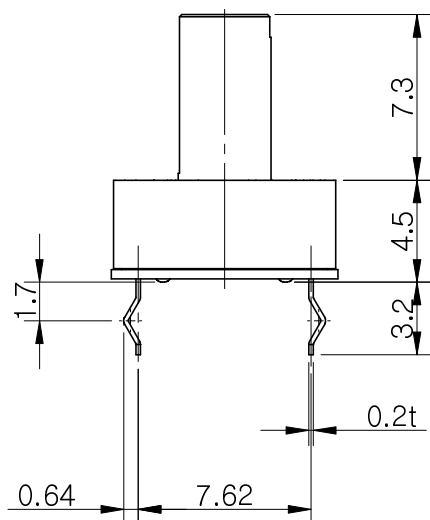

P.C.B DIMENSION

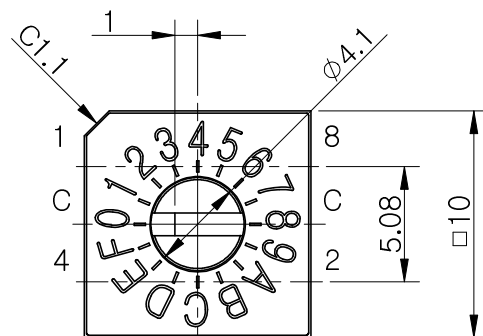

Specification

- Rating : 25mA, 12V DC (Switching)
25mA, 24V DC (None-Switching)
- Contact Resistance : 100mΩ Max
- Insulation Resistance : 100MΩ Min
- Operating Force : 700gf Max
- Life cycle : 10,000 steps

| | | Real Code | | | | |
|----------|---|-----------|---|---|---|---|
| Position | | C | 1 | 2 | 4 | 8 |
| | 0 | ● | | | | |
| | 1 | ● | ● | | | |
| | 2 | ● | | ● | | |
| | 3 | ● | ● | ● | | |
| | 4 | ● | | | ● | |
| | 5 | ● | ● | | ● | |
| | 6 | ● | | ● | ● | |
| | 7 | ● | ● | ● | ● | |
| | 8 | ● | | | | ● |
| | 9 | ● | ● | | | ● |
| | A | ● | | ● | | ● |
| | B | ● | ● | ● | | ● |
| | C | ● | | | ● | ● |
| | D | ● | ● | | ● | ● |
| | E | ● | | ● | ● | ● |
| | F | ● | ● | ● | ● | ● |

STANDARD LAYOUT

| | | | | | | |
|---------------|-------------|----------|---------------|--------------|--------------|--------|
| 01 | UDR Series | | 재질 <지정안함> | | 1 | - |
| NO. | DESCRIPTION | | MATERIAL | | COLOR/FINISH | VENDOR |
| DRAW/DESIGNED | CHECKED | APPROVED | G.TOL ±0.1 | TITLE | | |
| 2018-03-15 | | | | UDR Series | | |
| | | | UNIT mm | SCALE 3:1 | MODEL | SHEET |
| | | | SIZE A4 | DRAW NO. | UASR-16K0-01 | 1/1 |

SUNGmun ELECTRONICS CO.,LTD